


Using Macmess to emulate Oric and microdisc (incomplete).

Note : The disc controller emulation is not exact and some programs may fail to load. !!!

- Dolarfred-



You must first get the files:
orica.zip
and sedoric3.dsk

Put the file orica.zip
available on the Internet in
the ROMs folder

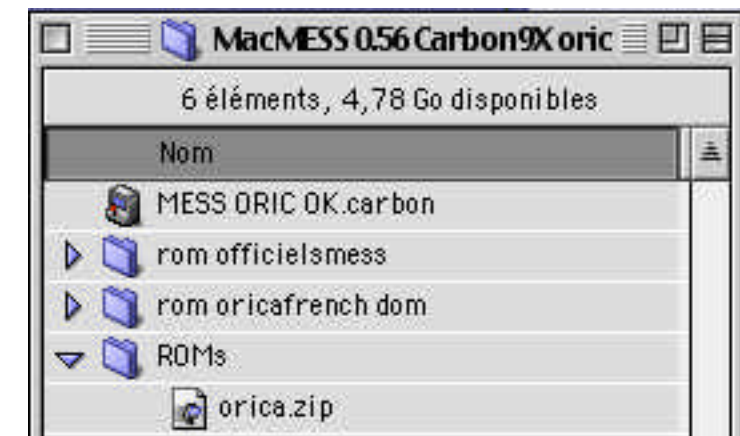


Launch MacMess, the Macmess windows open (see below)

Click on Floppy and choose disc image
'sedoric3.dsk (available on the Internet).

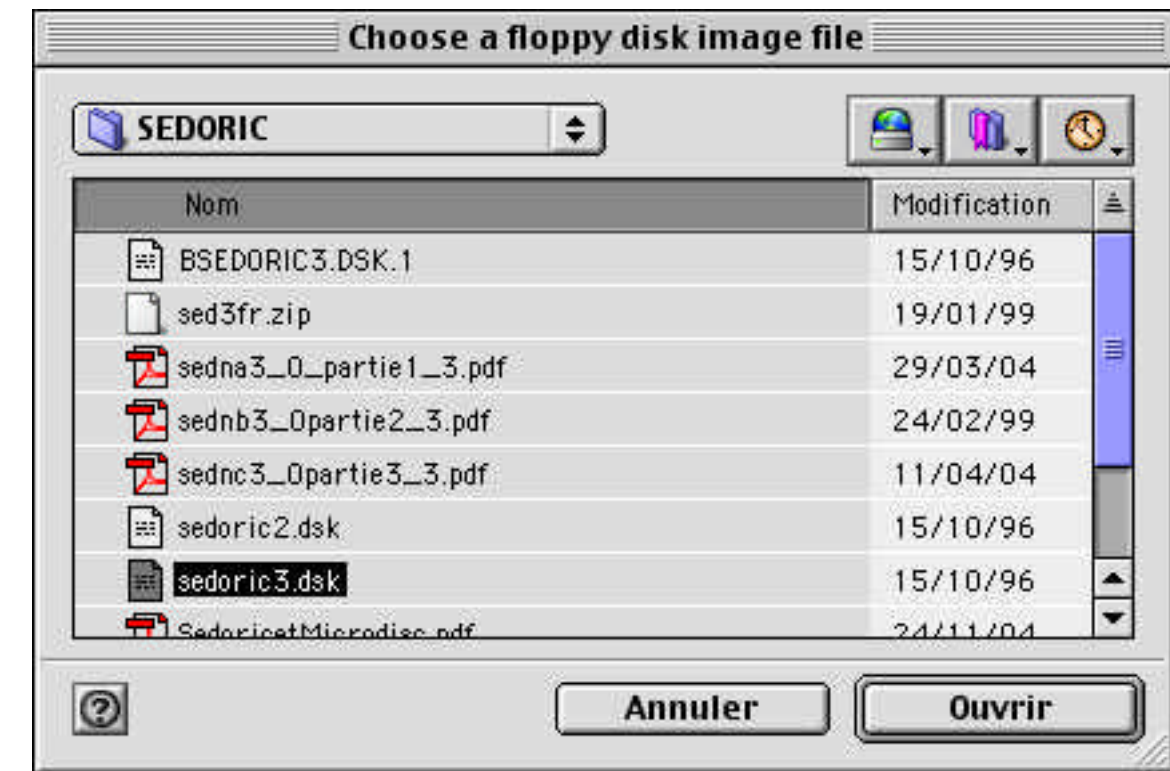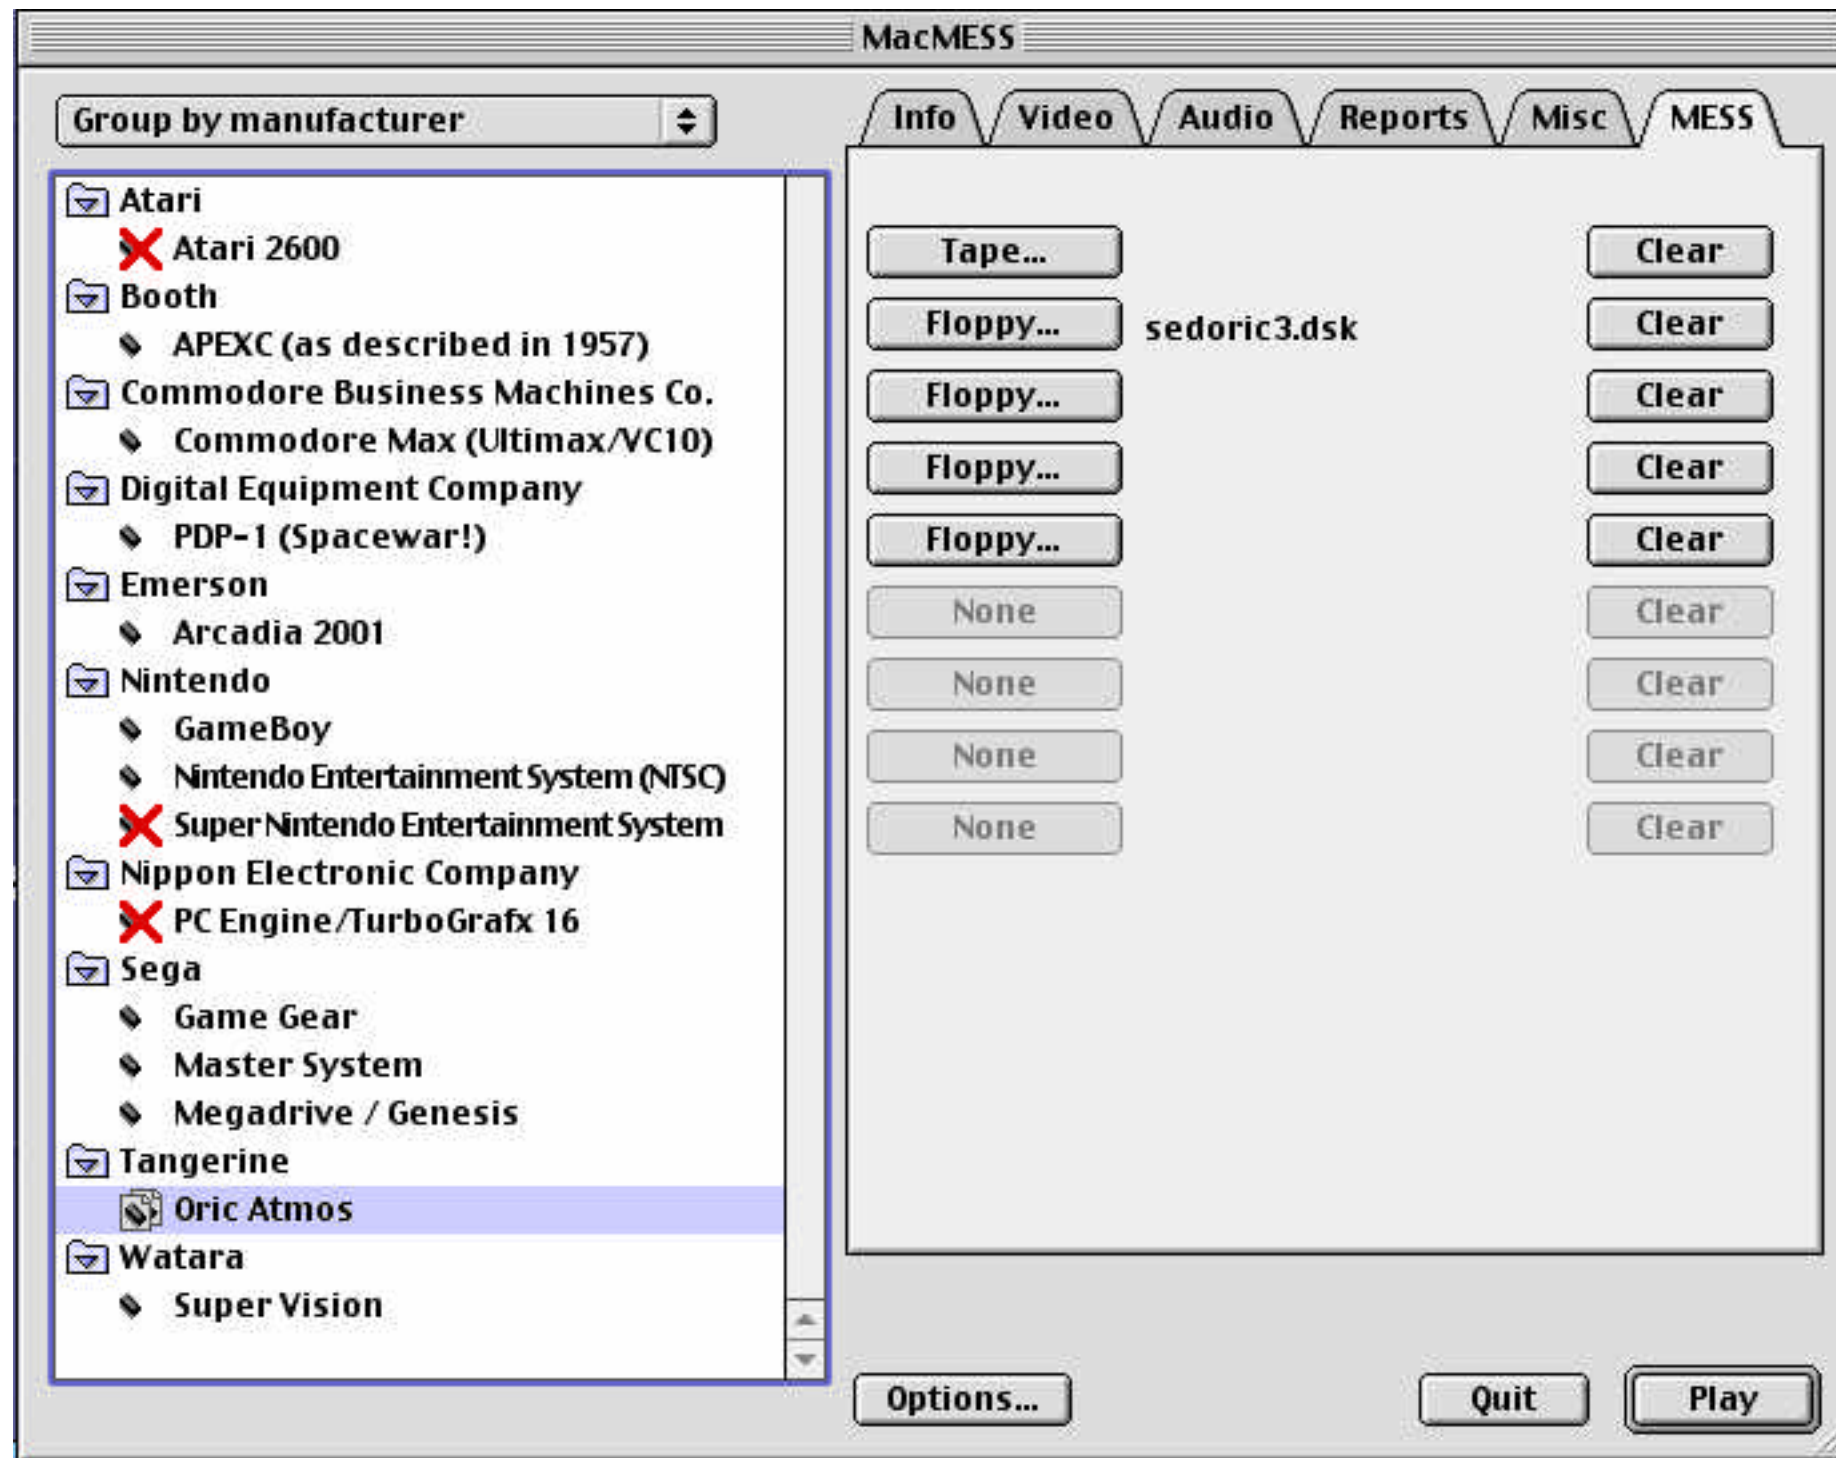

Set up sound and video preferences

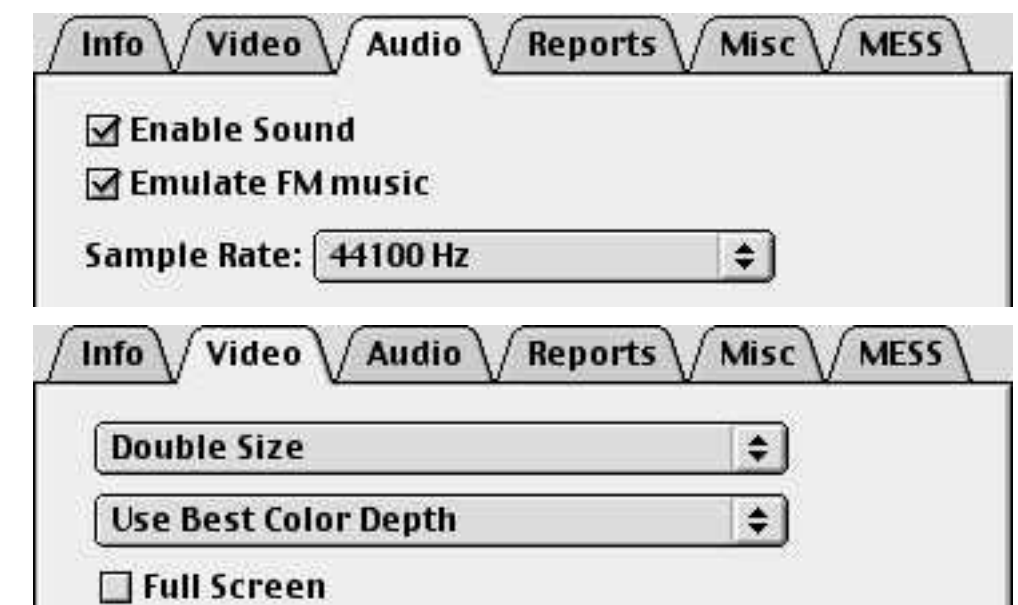


Click on 'Play' - then execute the displayed instructions

You'd arrived on the ORIC startup-screen

(The screens below match with my personal adapted french ROM , it doesn't change anything to the principle)

In short : press ESC to return pause the emulation and enable the UI again. If ESC does not work (it is generally the case when emulating computers), press Scroll Lock (F14), to get ' PARTIAL EMULATION ' then ESC. If you keyboard has no Scroll Lock key, press Ctrl and NumLock (Clear) simultaneously, then ESC. Then press tab key ' -->' to input in the setting mode.

(Note : Above version 0.56 version press function (apple) + enter to return pause the emulation...)

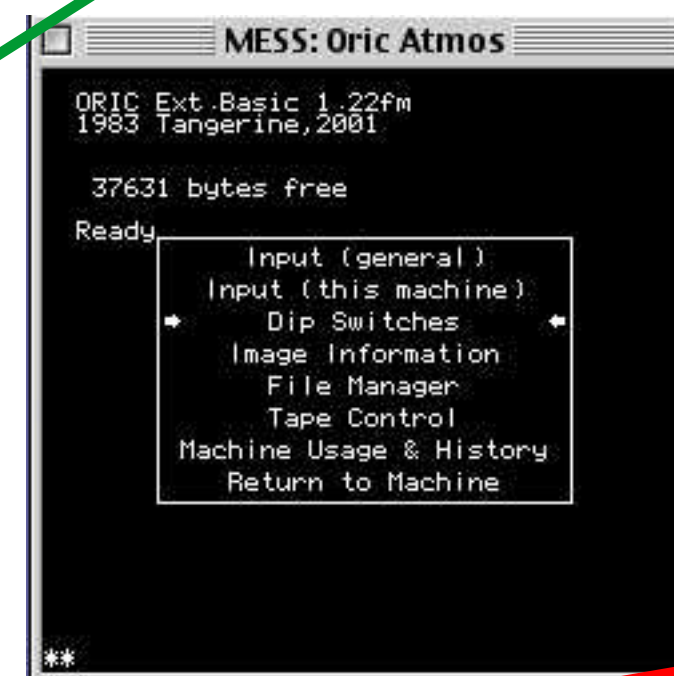

Choose
'Dip Switches'
with arrows
Then press 'enter'
(<--')

(2 stars are displayed in pause mode ..)



Choose Floppy...
With the following
arrows
--> OU <--
Choose Microdisc
Then
'Return to Main Menu'
Press enter



Press Esc to return back to emulation mode
- Press F3 to reset the oric computer
You should get the startup sedoric screen

